


## M&M Poultry's PCL1000 Conveyor Lubricator

# CONVEYOR LUBRICATOR

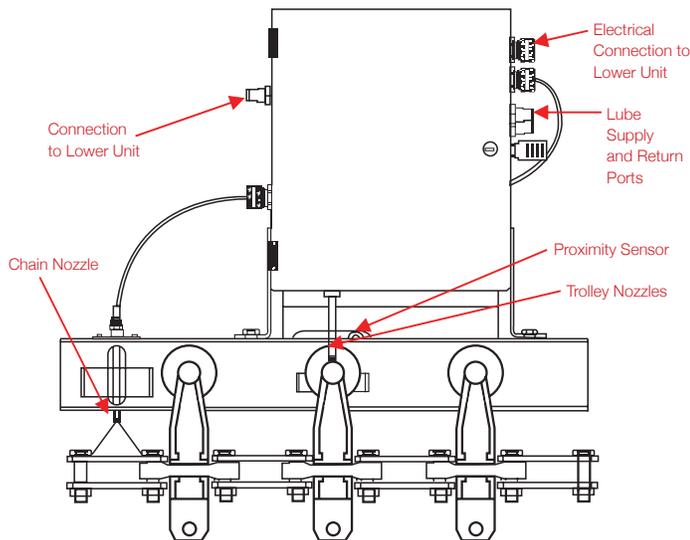


**Upper Lubricating Head**

This lubrication system for poultry trolleys and chain with trolleys on 6" centers is designed for "1" beam style straight track with bolted or rivet-less type 3" pitch chain. The machine consists of

two lubricating heads and one supply pump controller for operation of both dispensing heads. All enclosures are NEMA4X SS. Each upper dispensing head has four measuring dispensers, and lubricates trolleys inside out, outside in and the chain. The signal to lubricate the two chain pins is from the trolley lube proximity sensor. Lubricator includes pre-modified straight track section to be welded

in place. The Lower Unit of lubrication system has a 1 1/2 gallon reservoir, supply pump, and NEMA4X stainless steel enclosures. It also contains

a power on light, low level light, and push buttons for operation of upper dispensing heads. Lubricator requires compressed air and 120 v.a.c. Includes 50 ft. of tubing and wires for connecting lower unit to the upper dispensing head. All connecting wires will be 24VDC.

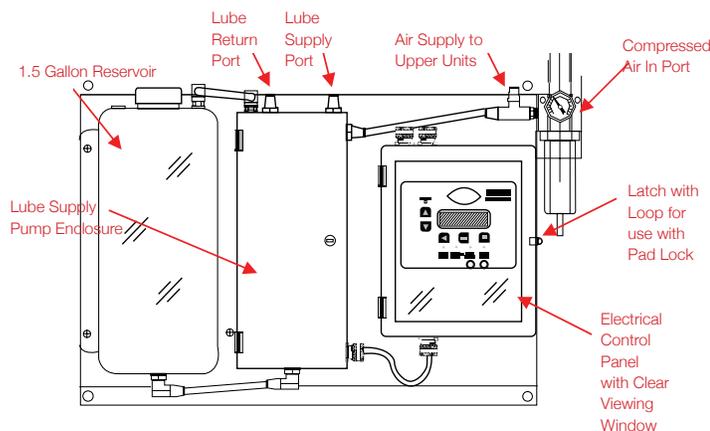

**Lower Supply Pump & Controls**

### PCL1000 Specifications

<b>LUBRICANT</b>	For use with Purity Food Grade White Oil #15.
<b>AMBIENT TEMPERATURE</b>	35 to 140°F
<b>FLOAT SWITCH</b>	With flashing low level light.
<b>LUBRICATES</b>	Trolley and Chain Pins
<b>ANTI-DRIP NOZZLES</b>	Each nozzle has a check valve to eliminate dripping.
<b>CONVEYOR SPEED</b>	1 to 90 ft. per minute
<b>NOZZLES</b>	All nozzles are constructed with 1/4" O.D. SS Tubing for ultimate rigidity and corrosion resistance.
<b>ELECTRICITY</b>	120 v.a.c. 50/60 Hz, All connecting wires are 24VDC.
<b>COMPRESSED AIR</b>	80 p.s.i. minimum
<b>SHOT VOLUME</b>	Adjustable
<b>CONVEYOR TRAVEL</b>	Either or both directions.
<b>VOLUME CONTROL</b>	Each nozzle can be adjusted from 0-.002 c.i.
<b>AUTOMATIC</b>	Only lubricates when operator opens control panel and activates the lube cycle for Unit 1 or Unit 2. Machine can be programmed to lubricate for a set amount of time or continuously.
<b>MATERIALS</b>	Stainless steel enclosures and frame. Fittings are brass and stainless.

for more info:

**CALL**  
**800.873.9687**

**VISIT**  
**mandmpoultry.com**

Hollister, MO  
Attalla, AL  
Ft. Smith, AR  
Springdale, AR



■ 800.873.9687  
■ [mandmpoultry.com](http://mandmpoultry.com)